


MF□-P□5

Individual Wiring Type Manifold
Bar Type

- MFS□-PC5**
common SUP, common EXH,
port 1,3 &5 on both sides
- MFS□-PD5**
Common SUP, common EXH,
port 1,3 &5 on one side
- MFS□-PI5**
Common SUP, individual EXH,
port 1 on one side

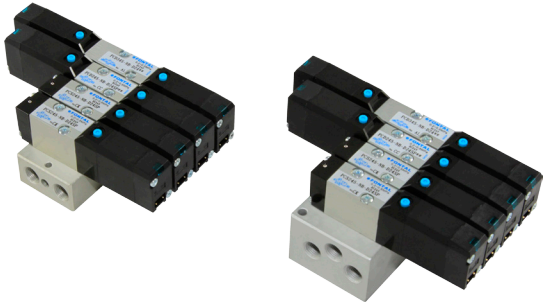

Manifold Specifications

Type of manifold		MFS□-PC5	MFS□-PD5	MFS□-PI6
		common SUP, common EXH, port 1,3 & 5 on both sides	common SUP, common EXH, port 1,3 & 5 on one side	common SUP, common EXH, port 1 on one side
Port size	Port 1	Rc $\frac{1}{8}$ (Both side)	Rc $\frac{1}{8}$ (One side)	Rc $\frac{1}{8}$ (One side)
	Port 3, 5	Rc $\frac{1}{8}$ (Both side)	Rc $\frac{1}{8}$ (One side)	Rc $\frac{1}{8}$ (Valve body ported)
	Port 2, 4	Rc $\frac{1}{8}$	M5	M5
	Port Y	—	—	—
	Port X	—	—	—
Number of stations		2~20		
Mountable solenoid valve		PCS245(U) - NB - ※ PCD245(U) - NB - ※ PCD345(U) - NB - ※ PCE345(U) - NB - ※ PCO345(U) - NB - ※		PCS245 - R5 - ※ PCD245 - R5 - ※ PCD345 - R5 - ※ PCE345 - R5 - ※ PCO345 - R5 - ※
Blank plate		PC5-BP		

Optional Parts

Part name		Model No.
Blank plate	For individual exhaust of pilot	PC5-BP

Manifold



Type of manifold

MFS: Valve body ported,
port 2 & 4 on the side

N: Number of stations

2 : 2 stations
:
:
10 : 10 stations

Option

No mark: Standard
B : With bracket
Note: Bracket is available
for PCS245 mounting.

Port size 2&4

M5: M5×0.8
O1: RC $\frac{1}{8}$

Mountable solenoid valve series


PC5 : common SUP, common EXH, port 1,3 & 5 on both sides
PD5 : common SUP, common EXH, port 1,3 & 5 one side
PI5 : common SUP, individual EXH, port 1 one side

Mountable solenoid valve




Model No.


PCS245




PCD245




PCD345



PCE345



PCO3406



Manual override

No mark: Standard
(Non locking)
※LB : With locking button

Wiring

L : Lead wire
SP : Connector with lead wire

Voltage

110: AC110V
220: AC220V
D24: DC24V

Port size

NB: Without sub-base
R5: Port 3&5, valve body ported (M5)
Note: A gasket & two mounting screws come with valve.

Special specifications

No mark : Standard (Individual exhaust of pilot)
U : External pilot (Valve body ported) Individual exhaust of pilot





※: Made to order

MFS□-PC5-01


(Unit: mm)

Note: Standard manifold is plugged on "R" (Right) side ports.

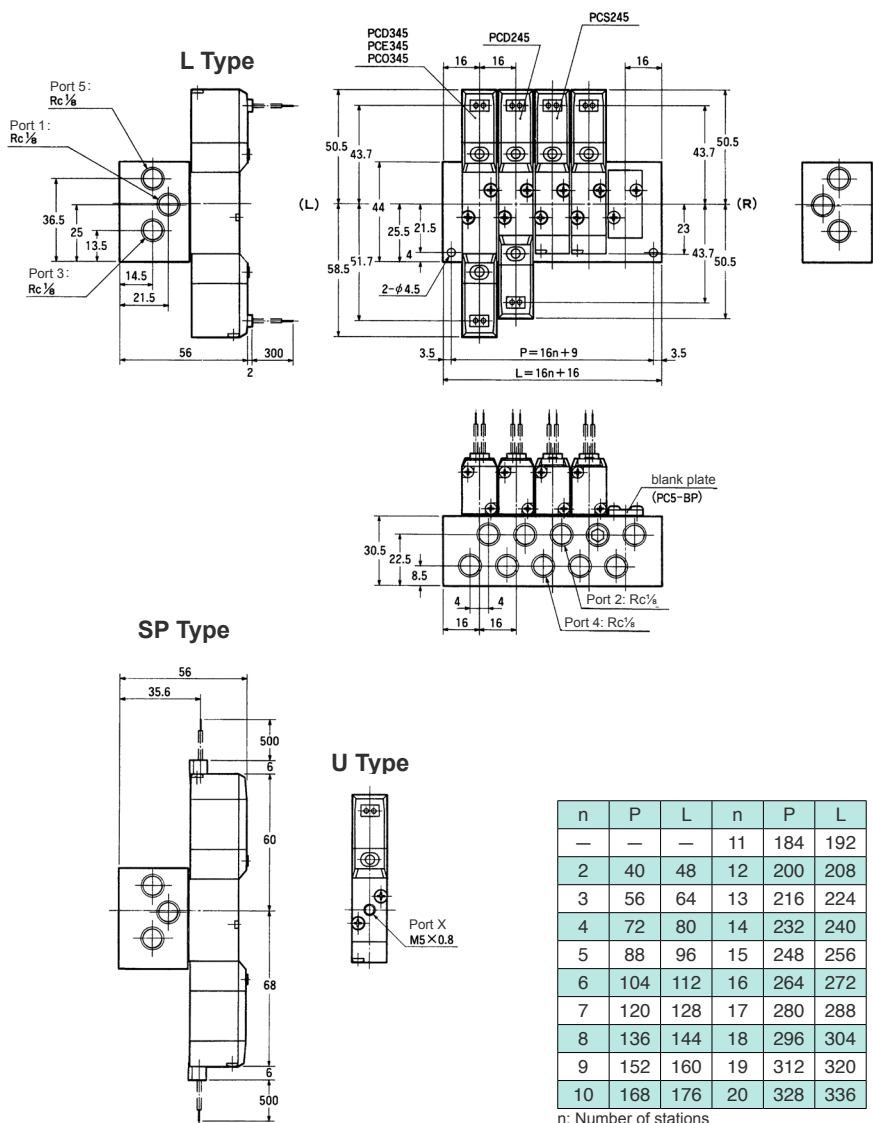

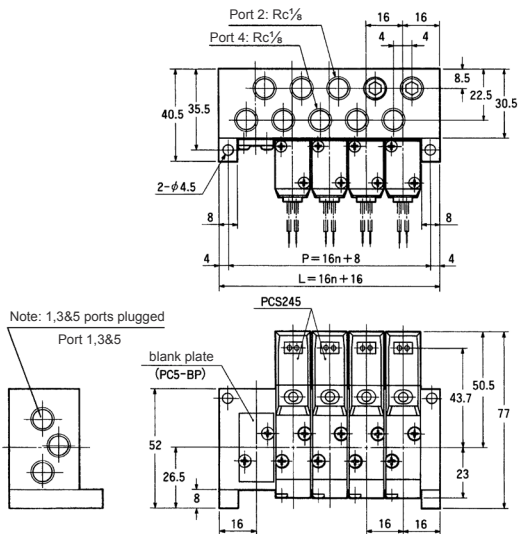


L Type

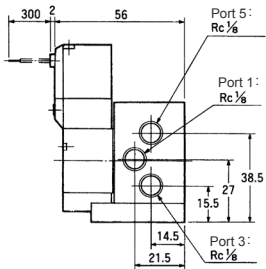


n	P	L	n	P	L
—	—	—	11	184	192
2	40	48	12	200	208
3	56	64	13	216	224
4	72	80	14	232	240
5	88	96	15	248	256
6	104	112	16	264	272
7	120	128	17	280	288
8	136	144	18	296	304
9	152	160	19	312	320
10	168	176	20	328	336

n: Number of stations

U Type




SP Type



MFS□-PD5-M5



(Unit: mm)

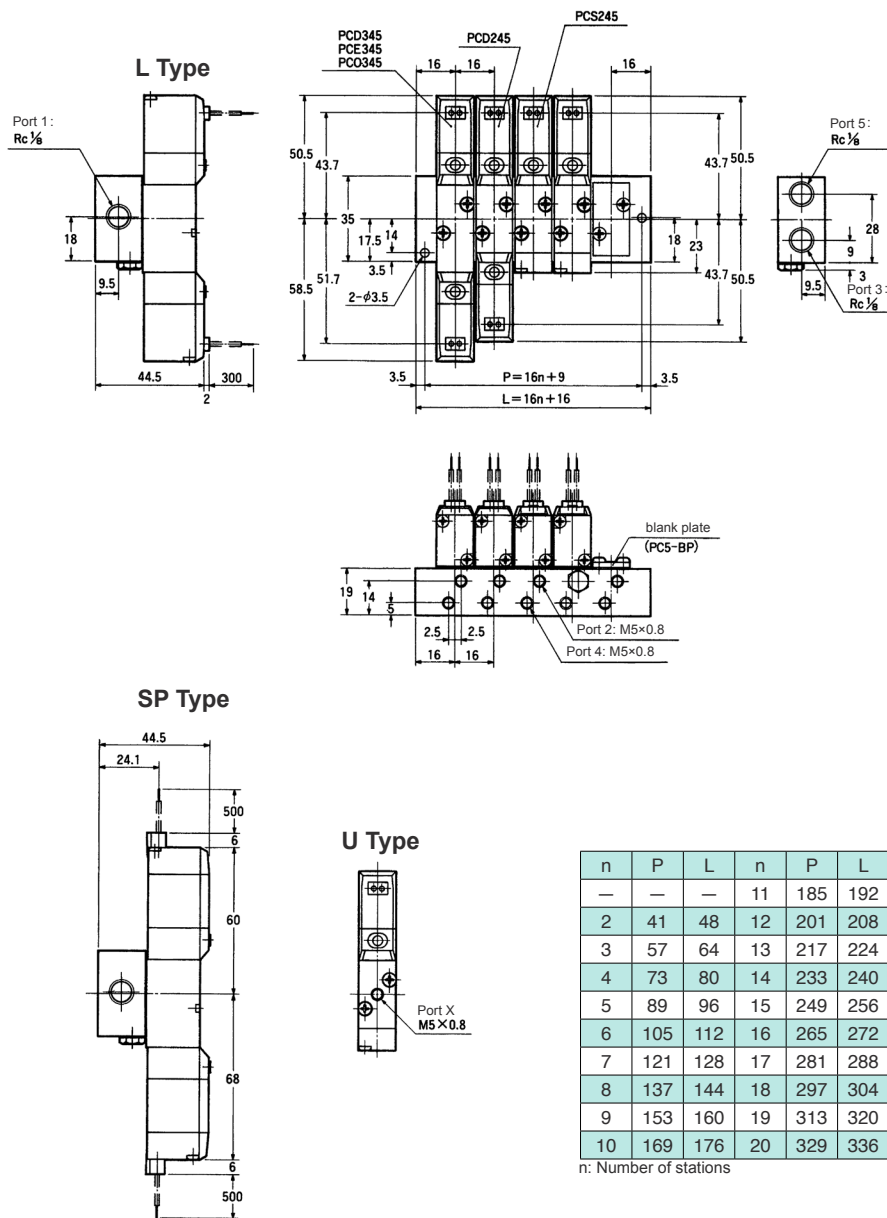

MFS□-PD5-M5-B


(Unit: mm)

PC/RC5,13

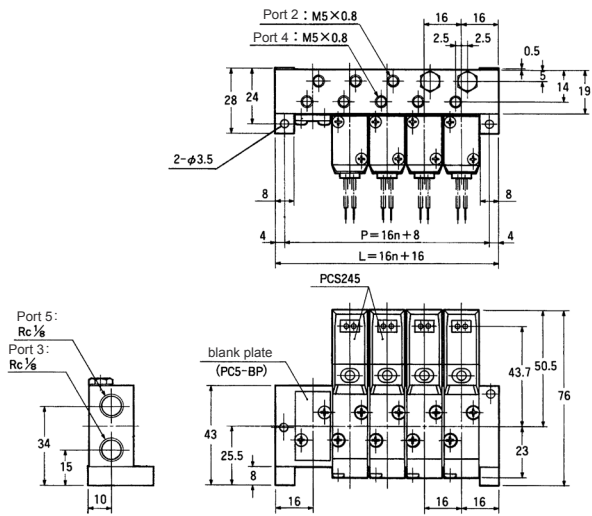

n	P	L	n	P	L
—	—	—	11	184	192
2	40	48	12	200	208
3	56	64	13	216	224
4	72	80	14	232	240
5	88	96	15	248	256
6	104	112	16	264	272
7	120	128	17	280	288
8	136	144	18	296	304
9	152	160	19	312	320
10	168	176	20	328	336

n: Number of stations

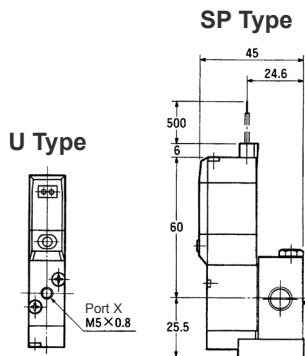

MFS□-PI5-M5

(Unit: mm)

