


Air Lubricator/L45, L55, L105

JIS Symbol 




Representation

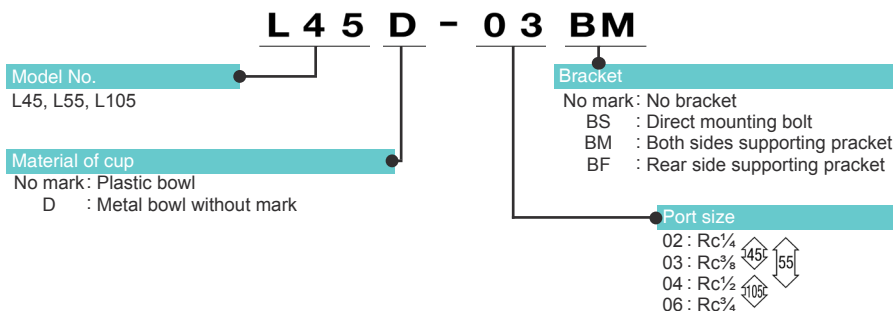

Specifications

Model No.	Unit	L45	L55	L105
Port size		Rc $\frac{1}{4}$	Rc $\frac{1}{4}$, $\frac{3}{8}$, $\frac{1}{2}$	Rc $\frac{1}{2}$, $\frac{3}{4}$
Max. operating pressure	MPa (kgf/cm 2)	1 [10] (D : 1.4 [14])		
Surrounding temperature range	°C	5 ~ 50 (D : 5 ~ 65)		
Lubricator bowl capacity (Oil)	cm 3	43	78	240
Min. flow rate of dripping	l/min (ANR)	50	50	80
Weight	kg	0.25	0.30	0.58
Recommended oil		ISO VG32		

Construction

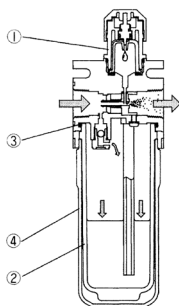


Components and Parts

No.	Name	L45	L55	L105	Material
1	Sight glass	L450213			PC
2	Plastic bowl	—	L550315	L1050415	PC
3	Bowl gasket	B45BB01	B55BB01	AS138	NBR
4	Bowl guard	—	B550303	B1050403	PE (PA)


Flow characteristics

(Unit: mm)


L45

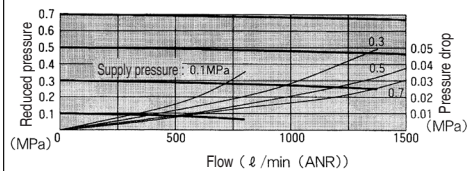


L45

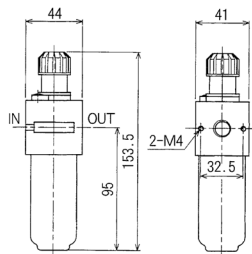


L55

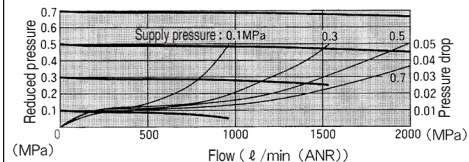

L55

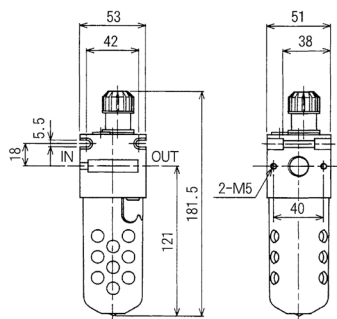

L105

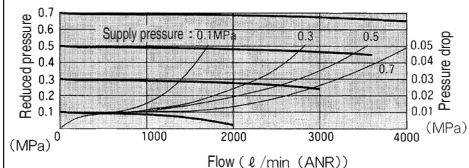

L105

