

Air Muffler

**SL-1
SL-2L
SL-3
SL-4
SL-6
SL-8**




A muffler is suitable to remove and mitigate the irritating noise caused by compressed air discharge. A muffler is unrelated to the performance of pneumatic machines.

Specifications

Model No.	Unit	SL-1	SL-2L	SL-3	SL-4	SL-6	SL-8
Screw thread size	PT	R $\frac{1}{8}$	R $\frac{1}{4}$	R $\frac{3}{8}$	R $\frac{1}{2}$	R $\frac{3}{4}$	R1
Fluid		Air					
Operating pressure range	MPa	0~1					
Ambient temperature	°C	-5~60					
Silencing effects	dB	20 or more			25 or more		
Weight	g	1	3	15	18	22	30

Note) When the temperature falls below 5 °C, please provide air dryer to prevent water frozen.


Representation



① Screw thread size

- 1 : R $\frac{1}{8}$
- 2L : R $\frac{1}{4}$ (Long type)
- 3 : R $\frac{3}{8}$
- 4 : R $\frac{1}{2}$
- 6 : R $\frac{3}{4}$
- 8 : R1

Dimensions

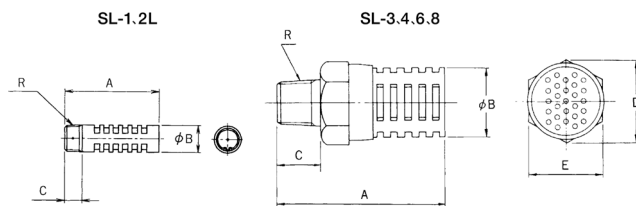

Model no.	R	A	∅ B	C	D	E
SL-1	1/8	35	10	6.8	—	—
SL2	1/4	43.5	15	8	—	—
SL-3	3/8	52.5	25	13.5	28	26
SL-4	1/2	57.5	28	16.5	33.5	29
SL6	3/4	62.5	31	18.5	37	32
SL-8	1	68	36	19	43.9	38

(Unit: mm)

⚠ Caution

Excessive lateral load force may damage silencer made by synthetic resin.