


SS22/23 Series

2, 3-port solenoid valve
Direct-drive/in-line mounting type

- SS2200**
2-port, 2-position solenoid

SS2300
3-port, 2-position solenoid

- Light and compact with simplistic structure
- Easy for operation, and quick repairment
- Large flow rate

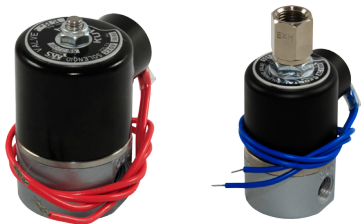


Specifications

Model No.				Unit	SS2200		SS2300			
Fluid applied					Non-lubricated/lubricated air					
Port size				PT	Rc¼		Rc¼			
Effective area				mm²	2.1		2.1			
Pressure range				MPa	0 ~ 0.7		0 ~ 0.7			
Operating ambient temperature				°C	5 ~ 55					
Rated voltage				V	AC110, 220		DC24	AC110, 220	DC24	
Frequency				Hz	50 / 60 (Common)		—	50 / 60 (Common)		—
Proper pressure variation				%	±10					
Apparent power	AC	Holding	50Hz	VA	10	—		16	—	
			60Hz	VA	8	—		14	—	
		Inlush	50Hz	VA	25	—		26	—	
			60Hz	VA	20	—		22	—	
Power consumption DC				W	—		8.4	—		11
Insulation classification					JIS Class B					
Wiring					Wiring					
Mass				kg	0.43		0.43			


(Note) When the temperature falls below 5°C, please provide air dryer to prevent water frozen.

Representation




- ① Model No.
 SS2200
 SS2300
- ② Port size
 02 : Rc¼
- ③ Voltage
 D24 : DC24V
 110 : AC110V
 220 : AC220V

JIS Label

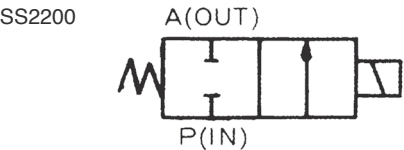


(Unit : mm)


SS2200

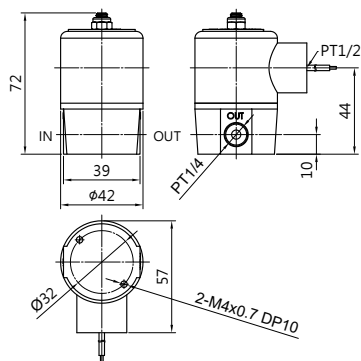

SS2200

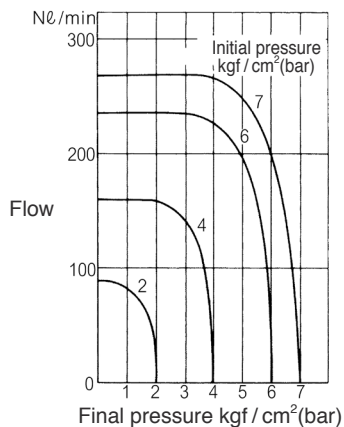

SS2300

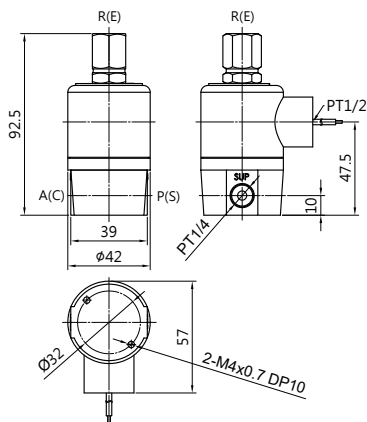

SS2300

