

Air Lubricator/L508

Miniature

- Support air lubricating without turning off the air supply.
- Enhance stability and reliability for air lubricating.
- Easy for operation, installation, and repair.

JIS Symbol





L508-02

Specifications

Model No.		Unit	L508-02
Port size			Rc1/4
Maximum operating pressure	Platic bowl	MPa[kgf/cm ²]	1 (10)
Proof pressure	Platic bowl	MPa[kgf/cm ²]	1.5 (15)
Operating temperature range	Platic bowl	°C	5~50
Minimum dropping flow rate		l/min (ANR)	About 30
Capacity of Air lubricator bowl		cc	30
Recommended lubricant			(ISO VG32)
Weight		kg	0.13

Flow characteristics

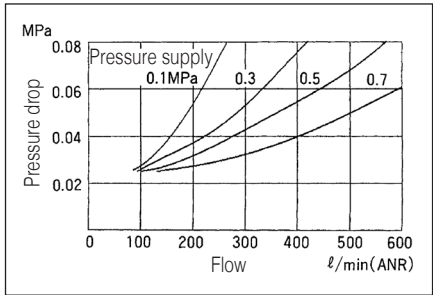

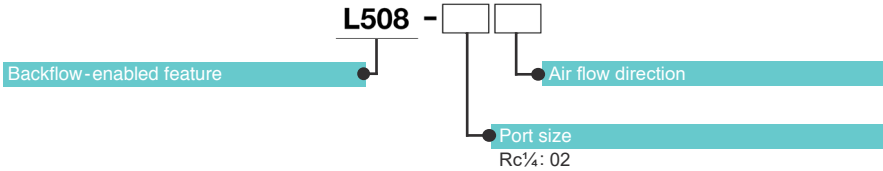

• Please refer to symbol specification table and option table.

Option

Model No.		Mark	L508-02
Bowl material			Platic bowl
Air flow direction	Left to Right	Without mark	⊙
	Right to Left	R	○

⊙ Standard ○ Option

Dimensions

(Unit : mm)

L508-02

